


922.1XXX

Douilles ULTIMATE® 6 pans

1/2"

### LES + PRODUITS :

- Selon DIN 3124 / ISO 2725
- Carré d'entraînement intérieur selon DIN 3120 / ISO 1174 avec encoche pour verrouillage par bille
- Profil Superlock
- Finition chromée satinée
- Chrome Vanadium

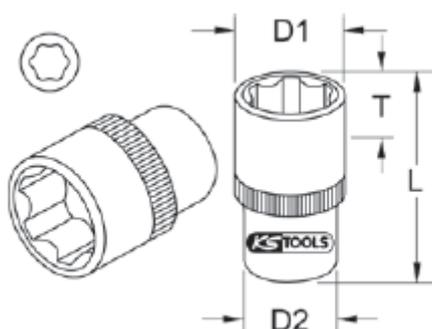

	mm	mm	D1 mm	D2 mm	L mm	T mm	9
922.1208	8,0		13,0	22,0	38,0	15,0	50
922.1209	9,0		14,0	22,0	38,0	15,0	50
922.1210	10,0		16,0	23,0	38,0	14,0	50
922.1211	11,0		17,0	23,0	38,0	13,0	53
922.1212	12,0		18,0	23,0	38,0	13,0	55
922.1213	13,0		20,0	23,0	38,0	13,0	60
922.1214	14,0		21,0	23,0	38,0	13,0	62
922.1215	15,0		22,0	24,0	40,0	15,0	65
922.1216	16,0		23,0	24,0	40,0	16,0	68
922.1217	17,0		24,0	23,0	40,0	17,0	70
922.1218	18,0		26,0	23,0	40,0	17,0	72
922.1219	19,0		27,0	24,0	40,0	17,0	80
922.1220	20,0		28,0	26,0	40,0	17,0	85
922.1221	21,0		30,0	26,0	42,0	19,0	95
922.1222	22,0		31,0	26,0	42,0	19,0	100
922.1223	23,0		34,0	30,0	40,0	19,0	110
922.1224	24,0		33,0	28,0	42,0	19,0	110
922.1225	25,0		34,0	30,0	40,0	20,0	132
922.1226	26,0		36,0	32,0	42,0	21,0	165
922.1227	27,0		36,0	32,0	42,0	21,0	156
922.1228	28,0		38,0	32,0	42,0	21,0	178
922.1229	29,0		38,0	32,0	42,0	21,0	195
922.1230	30,0		40,0	33,0	44,0	22,0	195
922.1231	31,0		42,0	36,0	44,0	22,0	215
922.1232	32,0		42,0	36,0	44,0	22,0	215
922.1234	34,0		46,0	37,0	45,0	23,0	260
922.1236	36,0		48,0	38,0	45,0	23,0	260
922.1340	3/8"		15,0	16,0	16,0	9,0	50
922.1341	7/16"		16,0	17,0	17,0	9,0	50
922.1342	1/2"		19,0	19,0	19,0	13,0	60
922.1343	9/16"		20,0	21,0	21,0	13,0	60
922.1344	19/32"		22,0	22,0	22,0	14,0	60
922.1345	5/8"		24,0	24,0	24,0	14,0	60
922.1346	21/32"		24,0	22,0	38,0	14,0	64
922.1347	11/16"		24,0	24,0	24,0	16,0	70
922.1348	3/4"		27,0	27,0	27,0	16,0	90
922.1349	25/32"		28,0	24,0	38,0	20,0	81
922.1350	13/16"		28,0	28,0	28,0	17,0	90
922.1351	7/8"		30,0	30,0	30,0	18,0	120
922.1352	15/16"		32,0	32,0	32,0	19,0	130
922.1353	31/32"		32,0	38,0	38,0	20,0	105
922.1354	1"		34,0	34,0	34,0	19,0	150
922.1355	1.1/16"		36,0	36,0	36,0	20,0	170
922.1356	1.1/8"		38,0	38,0	38,0	20,0	170
922.1357	1.3/16"		40,0	32,0	43,0	21,0	198
922.1358	1.1/4"		40,0	42,0	42,0	21,0	240